(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



05 MAY 2005

(43) International publication date
21 May 2004 (21.05.2004)

PCT

(10) International publication number

WO 2004/041566 A1

(51) International patent classification⁷:

B60H 1/00

(21) International application number:

PCT/EP2003/011986

(22) International filing date:

29 October 2003 (29.10.2003)

(25) Language of filing:

German

(26) Language of publication:

German

(30) Data relating to the priority:

102 51 760.6

5 November 2002 (05.11.2002) DE

(71) Applicant (for all designated States except US): BEHR GMBH & CO. [DE/DE]; Mauserstrasse 3, 70469 Stuttgart

(72) Inventors; and

(DE).

(75) Inventors/Applicants (US only): EBNER, Günter [DE/DE]; Kelterstrasse 16, 70825 Korntal-Münchingen (DE). WOLF,

Walter [DE/DE]; Steinbacher Strasse 34/1, 71570 Oppenweiler-Zell (DE).


- (74) Joint Representative: BEHR GMBH & CO.; Intellectual Property, G-IP, Mauserstr. 3, 70469 Stuttgart (DE).
- (81) Designated states (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated states (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE,

[continued on next page]

As printed

(54) Title: DEVICE AND METHOD FOR AIR DISTRIBUTION IN A VEHICLE

(54) Bezeichnung: VORRICHTUNG UND VERFAHREN ZUR LUFTVERTEH UNG IN EINEM FAHRZEUG

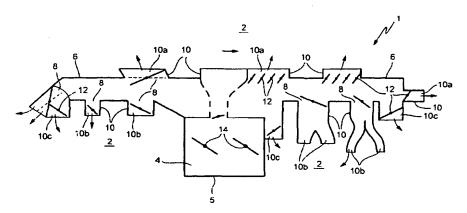

(57) Abstract: The aim of the invention is to develop a particularly simple, small-sized and low cost device for air distribution in a car cabin. The inventive ventilating element (4) for generating an air flow (L) is connected to at least one flow channel (6) leading to several exhaust air elements (10) which are connected to the cabin (2). The inventive flow channel (6) is embodied in the form of a multichamber common channel (16) which is provided with several exhaust air elements (10) and comprises several output openings (8) leading directly to the exhaust air elements (10).

(57) Zusammenfassung: Für eine besonders einfache und platzsparende sowie kostengünstige Vorrichtung zur Luftverteilung im Innenraum (2) eines Fahrzeugs ist erfindungsgemäss ein Belüftungselement (4) zur Erzeugung eines Luftstroms (L) mit mindestens einem Strömungskanal (6) verbunden, der in mehrere in den Innenraum (2) führende Auslässe (10) mündet, wobei der Strömungskanal (6) als ein gemeinsamer Mehrkammerkanal (16) für mehrere Auslässe (10) ausgehildet ist und mehrere Austrittsöffnungen (8) aufweist, die untnittelbar in die Auslässe (10) münden.

A 7971404100

WO 2004/041566 A1

DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

Declaration under Rule 4.17

of inventorship (Rule 4.17(iv)) for the following designation US.

Published:

With International Search Report.

For an explanation of the two-letter codes and the other abbreviations, reference is made to the explanations ("Guidance Notes on Codes and Abbreviations") at the beginning of each regular edition of the PCT Gazette.